


# SlideLine Patio Doors

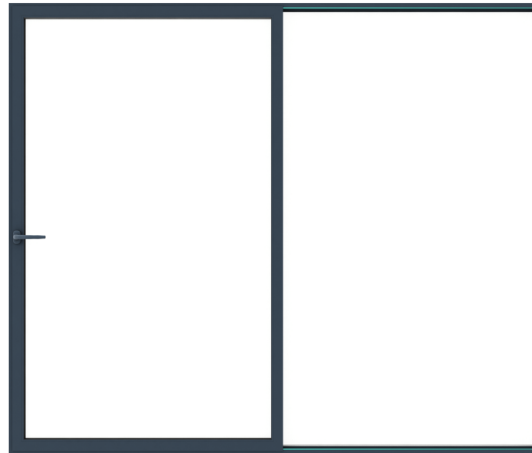

## Specification

Thermal efficiency	
U <sub>w</sub> *: Coefficient value for reference design	0,76 W/(m <sup>2</sup> K)*
U factor*:	---
*:	for door of dimensions: 2460 x 2180 mm with 3-glass package of U <sub>g</sub> value 0,5 W/(m <sup>2</sup> K) and the swisspacer
Profile	
Profile name:	SlideLine
Installation depth:	Sash: 76 mm   Frame: 152 mm   Bars: 76 mm
Number of chambers:	Frame: 7   Sashes and bars: 5
Thermal break:	does not apply
Number of seals:	2 EPDM seals
Glass	
Glazing package:	4/18/4/18/4
U <sub>g</sub> value:	0,5 W/m <sup>2</sup> K
Glazing Package Thickness:	max. 48 mm
Sound insulation of available glazing:	from 31 to 45 dB
Fittings	

Type:	flush-sliding fitting
Hinges:	does not apply
Anti-theft protection:	does not apply
Microventilation:	yes
Other:	does not apply
<b>Handle</b>	
Colors:	Acc. to the equipment
Handle model:	501
<b>Maximum construction dimensions</b>	
Width:	max. 4000 mm   min. 1600 mm
Height:	max. 2600 mm   min. 1000 mm
<b>Sash size</b>	
Min. sash width:	814 mm
Max. sash width:	1950 mm
Min. sash height:	938 mm
Max. sash height:	2538 mm
Max. sash weight:	200 kg
Max. sash area:	4,4 m <sup>2</sup>
<b>Other</b>	
Other:	Frame's construction - screwed

## Photos

